

### Feature

400# WOG  
 DZR lead free brass body  
 F1807 full port  
 Barb (F1807) x MNPT  
 PEX end (ASTM F1807)  
 Threaded end (ASME B1.20.1-NPT)  
 Chrome plated ball  
 Virgin PTFE seats  
 Blow-out proof stem  
 Double NBR O-ring packing  
 CSA B125.14  
 AB1953, NSF/ANSI/CAN 61 & 372 certified  
  
 Option with wing handle (5006ABW) available




#### Pressure/ Temperature rating

300 psi from 15 °F to 160 °F	150 psi max. at 200 °F
------------------------------	------------------------

### Material

	Part	Material	Specification
1	Body	DZR Lead Free Brass	ASTM B927 C27453
2	End piece	DZR Lead Free Brass	ASTM B927 C27453
3	Ball	DZR Lead Free Brass / Cr plated	ASTM B927 C27453
4	Seat	PTFE	PTFE
5	Stem	DZR Lead Free Brass	ASTM B927 C27453
6	O-ring	NBR	NSF approved
7	Handle	Steel / Dacromet® plated	ASTM A36
8	Handle nut	Steel / Zn plated	ASTM A36

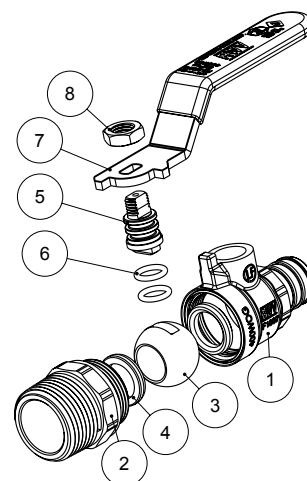

### Dimension, Weight

Size	T	A	H	L	P	C	Wt.
		[in]	[in]	[in]	[in]	[in]	[lb]
1/2"	1/2 - 14 NPT	2.39	1.38	3.19	0.35	0.61	0.28
3/4"	3/4 - 14 NPT	2.63	1.73	3.58	0.53	0.62	0.42
1"	1 - 11.5 NPT	3.19	1.85	3.58	0.71	0.77	0.64

