

Stainless Steel Full Port Ball Valve

Feature


150# WSP / 2000# WOG
Stainless Steel 2-Piece Body
Full port
Threaded ends (ANSI B16.34)
Reinforced PTFE seats
Blow-out proof stem
Locking handle
MSS-SP-110



Pressure / Temperature rating	
2000# WOG	150 psi max. at 366 °F

Material

	Part	Material	Specification
1	Body	Stainless Steel	ASTM A351 CF8M
2	End cap	Stainless Steel	ASTM A351 CF8M
3	Seat	RPTFE	-
4	Gasket	PTFE	-
5	Washer	PTFE	-
6	Packing	PTFE	-
7	Packing nut	Stainless Steel	ASTM SS304
8	Handle nut	Stainless Steel	ASTM SS304
9	Stem	Stainless Steel	ASTM SS316
10	Ball	Stainless Steel	ASTM SS316
11	Handle	Stainless Steel	ASTM SS304
12	Locking device	Stainless Steel	ASTM SS304
13	Handle sleeve	PVC	-

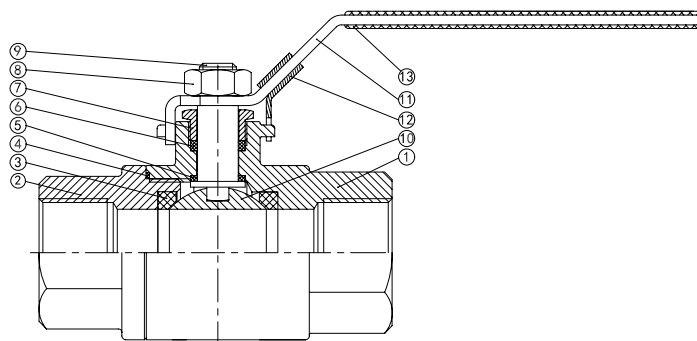

Dimension, Cv, Weight

Size	d [in]	T [in]	H [in]	L [in]	Cv	Weight [lb]
¼"	0.37	3.94	2.09	2.17	8	0.573
⅜"	0.37	3.94	2.09	2.17	8	0.573
½"	0.50	3.94	2.28	2.40	11	0.794
¾"	0.79	4.72	2.48	2.85	26	1.19
1"	0.98	5.51	2.80	3.54	55	2.16
1¼"	1.26	6.30	3.07	4.02	103	2.71
1½"	1.49	6.50	3.62	4.65	111	4.19
2"	2.00	7.99	3.94	5.28	353	7.19

