## 1-piece CSA Gas Ball Valve

## **Feature**

175# PSI
1-piece brass body
FNPT x FNPT
Threaded ends (ASME B1.20.1-NPT)
Chrome plated ball
ANSI Z21.15 / CSA 9.1
CSA ½, 2 & 5 psi
CSA ΔC
UL approved

Operating temperature range: -40°F to 140°F











## Material

	Part	Material	Specification		
1	Body	Brass	ASTM B283 C37700		
2	Stem	Brass	ASTM B124 C37700		
3	O-ring	FKM	-		
4	O-ring	HNBR 70SH	-		
5	O-ring	HNBR 70SH	-		
6	Ball	Brass / Cr plated	ASTM B124 C37700		
7	Seat washer	Brass	ASTM B124 C37700		
8	Body clip	Steel	DIN 17222		
9	Handle	Aluminum	ASTM B85 A03840		
10	Handle screw	Steel / Zn plated	ASTM A36		



## Dimension, Weight

Size	Т	A [in]	C [in]	H [in]	<b>L</b> [in]	P [in]	Wt.
1/2"	½ - 14 NPT	2.13	0.63	1.27	1.18	0.39	0.32
3/4"	¾ - 14 NPT	2.26	0.63	1.364	1.18	0.59	0.40

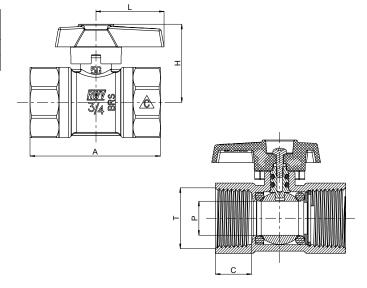



1

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.